

Flood Protection System



RS Stepanek KG



Flood barrier

Flood defense

Fire water retention

Custom designs

Benefits

Lightweight - can be deployed quickly and easily from pre packed pallets


Speed - the low weight and stackability enables fast deployment. Save Property in less time.

Long life - INERO™ flood barriers are made of steel and marine-grade aluminium that does not corrode, even in salt water. Exception: The H50 system consists of galvanized steel, additionally coated with Magnelis

Flexibility- can be configured to any contour course

Efficient - takes little storage space when stacked and is easy to transport

Protection heights from 500 - 1700 mm

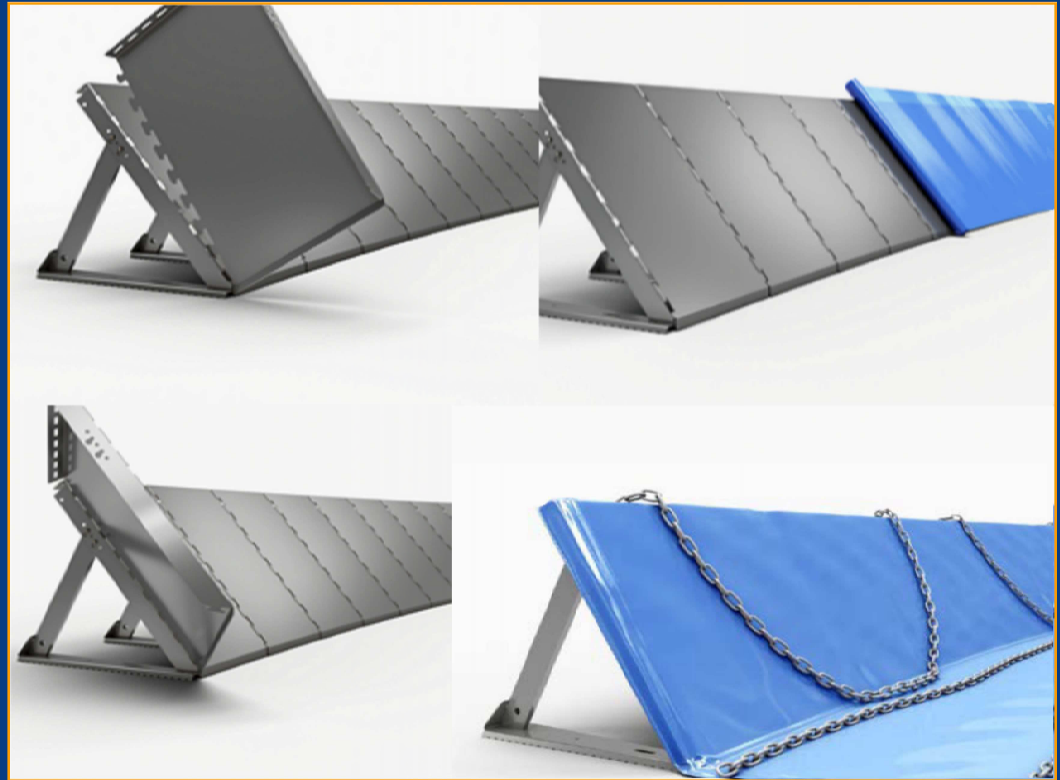

More Products of RS

- ◆ Demountable Barriers ESH/LN & ESH/KN
- ◆ Flood defence gates: HST (rotating, lifting, hinged, sliding and mitre gates)
- ◆ Flood defence doors: FST/A & HWT/S
- ◆ Windows sealings
- ◆ Special designs
- ◆ Automatic systems
- ◆ Fire water retention systems



Inero's patented flood barriers offer a flood protection solution that is lightweight, simple to use and quickly deployed. Primarily designed to provide flood defences for wide areas, the barrier can withstand water levels up to 1,8m.

The sections interlock using a patented quick connector to form a continuous, flexible barrier that adapts to all common substrates, such as concrete, grass, gravel and asphalt.

They can also be curved 90° through the use of corner sections. The barriers stop and withstand both standing and rushing water and can be assembled directly in the water as long as the water level is no more than 0,3m.

Six people can install 100m of complete barrier in about one hour.

Lightweight materials and innovative design contribute to a low weight and good stackability, simplifying storage and transport.

Two cargo pallets are enough for 100m of barrier. A cargo container can hold 700m of the H100 barrier.

After use the barriers can simply be cleaned and reloaded into their pallets.



RS Stepanek KG

Lindenstraße 9 D-65555 Limburg - Offheim

+49 6431/9582-0 +49 6431/9582-55

vertrieb@rs-stepanek.de www.rs-stepanek.de